

DEVELOP

Dynamic balance

www.develop.eu

Kolorowe urządzenie wielofunkcyjne A4
Develop ineo+ 3320i

Małe i wydajne urządzenie wielofunkcyjne Umożliwia wykonywanie wszystkich codziennych zadań biurowych: drukowania, kopiowania i skanowanie w jednym urządzeniu
Szybkie przetwarzanie prac

ineo+ 3320i



Funkcjonalność:

- Kopiowanie i drukowanie z prędkością do 33 str. A4 / minutę
- Skanowanie z prędkością do 56 str. A4 / minute w duplekcie
- Wbudowany kontroler 1.066 Ghz (standard)
- Automatyczne kopiowanie i drukowanie dwustronne
- Dwustronny podajnik dokumentów - dualny (skanuje od razu górę i dół)
- Karta sieciowa , Pamięć Ram 4GB
- Dupleks , Wyświetlacz 7"

Media:

- Standard: 500 arkuszy, max. 850 arkuszy
- Kasetka na 500 arkuszy (A6-A4, 60-210 g/m2)
- Podajnik ręczny o pojemności do 100 arkuszy (A6-A4+, 60-210 g/m2)

Urządzenie zawiera pełnowartościowe tonery o wydajności K: 13000 stron | CMY :9000 stron.

cena urządzenia, instalacja, transport netto: 5285 zł+ VAT 23% - 6500,00 zł brutto

EKSPLOATACJA TONERY ORYGINALNE

toner K: 346,00 zł brutto

toner CMY: 1 szt - 346,00 zł (są 3 szt) brutto

Option diagram

1 Enhanced Features

Antivirus
LK-116

2 Connectivity

Fax board
FK-517

Wireless LAN
UK-221

USB I/F kit
EK-P08

USB I/F kit
EK-P09

NFC kit
EK-P10

**I/F cable for CSRC
modem**
EK-P11


Biometric authentication
AU-102

ID card reader

Mount kit
MK-P08

legend

- Mandatory option
- Option
- This option can only be installed with the respective option above it

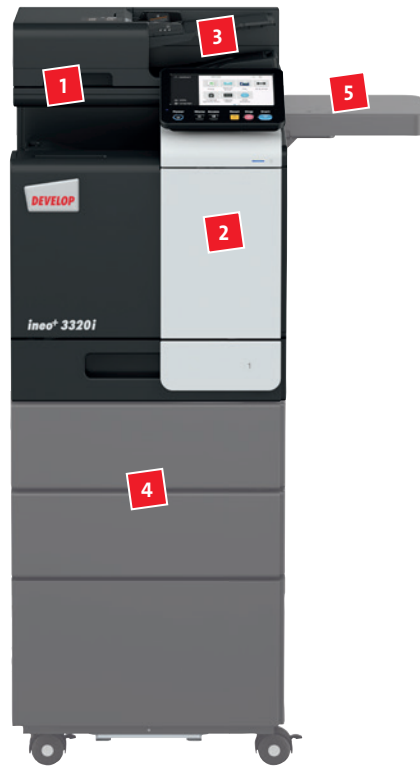

3 Others

Working table
WT-P03

10-Key pad
KP-P03

Keyboard holder
KH-P02

Air cleaning unit
CU-202

Mount kit
MK-P09

4 Media Input

Paper tray
PF-P20

Height adjustment unit
PF-P22

Copy desk
DK-P04x

5 Media output

Off-line stapler
FS-P04

Finishing functionalities



Duplex



Corner
stapling
(offline)

Description

Enhanced Features

LK-116 Antivirus	Bitdefender® Antivirus provides real time scanning of all incoming and outgoing data
-------------------------	--

Connectivity

FK-517 Fax board	Super G3 fax; digital fax functionality
UK-221 Wireless LAN	Wireless LAN and wireless LAN Access Point Mode
EK-P08 USB I/F kit	USB keyboard connection
EK-P09 USB I/F kit	USB keyboard connection; Bluetooth
EK-P10 NFC interface	To connect with Android mobile devices
EK-P11 I/F cable for CSRC modem	GPRS modem connection for CSRC
AU-102 Biometric authentication	Finger vein scanner
ID card reader	Various ID card technologies
MK-P08 Mount kit	Installation kit for ID card reader

Others

WT-P03 Working table	Authentication device placement
KP-P03 10-Key pad	For use instead of touchscreen
KH-P02 Keyboard holder	To place USB keyboard
CU-202 Air cleaning unit	Improving indoor air quality by reduced emissions
MK-P09 Mount kit	Installation kit for Air cleaning unit

Media Input

PF-P20 Paper tray	500 sheets, A4, 60-90 g/m ²
PF-P22 Height adjustment unit	To achieve comfortable height for operation
DK-P04x Copier desk	Provides storage space for print media and other materials

Media output

FS-P04 Off-line stapler	20-sheet off-line stapling
--------------------------------	----------------------------

Technical specifications

SYSTEM SPECIFICATIONS

Panel size/resolution	7" / 800 x 480
System memory (standard/max)	4,096 MB
System hard drive	16 GB (standard)
Interface	10/100/1,000-Base-T Ethernet; USB 2.0; Wi-Fi 802.11 b/g/n (optional)
Network protocols	TCP/IP (IPv4/IPv6); SMB; LPD; IPP; SNMP; HTTP(S); AppleTalk; Bonjour
Automatic document feeder (standard)	Up to 80 originals; A6–A4; 50–128 g/m ² ; Dualscan ADF
Paper input capacity (standard/max)	600 sheets / 1,100 sheets
Paper tray input (standard)	1x 500 sheets; A6–A4; custom sizes; 60–210 g/m ²
Paper tray input (optional)	1x 500 sheets; A4; 60–90 g/m ²
Manual bypass	100 sheets; A6–A4; custom sizes; 60–210 g/m ²
Automatic duplexing	A4; 60–210 g/m ²
Finishing modes (optional)	Group; Sort; Staple (offline)
Output capacity (standard)	Max. 250 sheets
Copy/print volume (monthly)	Rec. 6,500 pages; Max.* 96,000 pages
Toner lifetime	Black up to 13,000 pages CMY up to 9,000 pages
Imaging unit lifetime	Black up to 155,000 pages (imaging unit) CMY up to 55,000 pages (imaging unit)
Power consumption	220–240 V / 50/60 Hz; Less than 1.45 kW
System dimension (W x D x H)	420 x 528 x 572 mm (without options)
System weight	Approx. 38.4 kg (without options)

PRINTER SPECIFICATIONS

Print resolution	1,800 (equivalent) x 600 dpi; 1200 x 1200 dpi
Page description language	PCL 6 (XL3.0); PCL 5c; PostScript 3 (CPSI 3016); XPS
Operating System	Windows 7 (32/64); Windows 8/8.1 (32/64); Windows 10 (32/64); Windows Server 2008 (32/64); Windows Server 2008 R2; Windows Server 2012; Windows Server 2012 R2; Windows Server 2016; Windows Server 2019; Macintosh OS X 10.10 or later; Unix; Linux; Citrix
Printer fonts	80 PCL Latin; 137 PostScript 3 Emulation Latin
Mobile printing	AirPrint (iOS); Mopria (Android) Optional: WiFi Direct

SCANNER SPECIFICATIONS

Scan speed (mono/colour)	Up to 28/28 ipm in simplex Up to 56/56 ipm in duplex
Scan modes	Scan-to-eMail (Scan-to-Me); Scan-to-SMB (Scan-to-Home); Scan-to-FTP; Scan-to-USB; Scan-to-WebDAV; Scan-to-URL
File formats	JPEG; TIFF; PDF; Compact PDF; Encrypted PDF; XPS; Compact XPS; PPTX
Scan destinations	2,100 (single + group); LDAP support

COPIER SPECIFICATIONS

Imaging technology	Laser
Toner technology	HD polymerised toner
Copy/print speed A4 (mono/colour)	Up to 33/33 ppm
Autoduplex speed A4 (mono/colour)	Up to 33/33 ppm
1st copy out time A4	6.0/7.2 sec.
Warm-up time	Approx. 13 sec. in mono; 15 sec. in color ²
Copy resolution	600 x 600 dpi
Gradation	256 gradations
Multicopy	1–9,999
Original format	A6–A4; Custom sizes
Magnification	25–400% in 0.1% steps; Auto-zooming

FAX SPECIFICATIONS

Fax standard	Super G3 (optional)
Fax transmission	Analogue; i-Fax; Colour i-Fax; IP-Fax
Fax resolution	Up to 600 x 600 dpi
Fax compression	MH; MR; MMR; JBIG
Fax modem	Up to 33.6 Kbps
Fax destinations	2,100 (single + group)

SYSTEM FEATURES

Security Functions (standard)	IP filtering and port blocking; SSL2; SSL3 and TLS1.0/1.1/1.2 network communication; IPsec support; IEEE 802.1x support; User authentication; Authentication log; Secure print; Kerberos; Hard drive data encryption (AES 256)
Security Functions (optional)	Antivirus realtime scanning (Bitdefender®)
Accounting (standard)	Up to 100 user accounts; Active Directory support (user name + password + e-mail + smb folder); User function access definition
Accounting Functions (optional)	Biometric authentication (finger vein scanner); ID card authentication (ID card reader); Authentication by mobile device (Android/iOS)
Software	store+find (opt.); convert+share (opt.); Device Manager; Box Operator; Data Administrator (user accounts & cost centres); Card solutions (opt.); EveryonePrint (opt.)

¹ If the maximum volume is reached within a period of one year, then a maintenance cycle must be performed

² Warm-up time may vary depending on the operating environment and usage



DEVELOP